

TRENCH DRAIN GRATE

865 SERIES

FastTrack™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 865 Series reinforced galvanized steel slotted grating shall be used where necessary with FastTrack trench drain channels. Grating shall be corrosion resistant and approved for use in heavy-duty applications and parking areas with truck/vehicle traffic at less than 15 mph. Grating shall have large, open slots for increased flow capacity into channel and fasten to anchors with screws.

ADA: No

Heel-Proof: No*

Load Rating:

- DIN EN 1433: Class C250
- ASME A112.6.3: Heavy Duty

MATERIALS

Grate: 304 Stainless steel - 14 gauge

Framework: ductile iron (zinc-coated)

Screws: Stainless steel


FREE-AREA

60.0 in²

DIMENSIONS

- A:** Length 36"
- B:** Width 6"
- C:** Thickness 3/4"
- D:** Slot Length 5"
- E:** Slot Opening 7/16"

* Per ASME A112.6.3 requirements

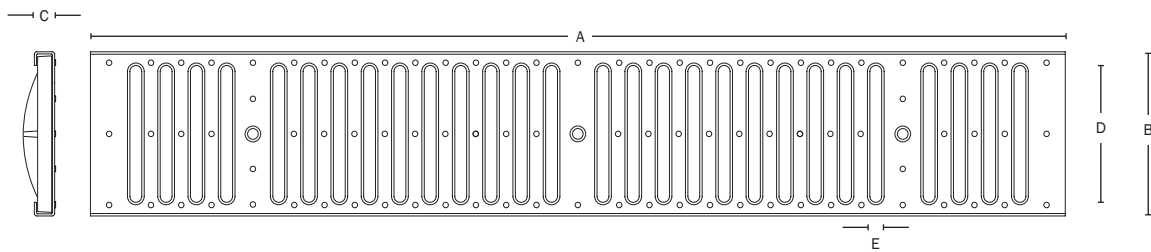

Item Number

865-GSSR