

ADJUSTABLE CLEANOUT

852 series

SPECIFICATION

Sioux Chief 852 Series adjustable cleanout shall be used where necessary in drainage systems. Cleanout shall have an MIP thread connection, for attachment to FIP fitting. Cleanout cover shall meet applicable load requirements for intended use. Cleanout shall include a slotted, polypropylene cleanout plug.

MATERIALS

ring/cover: nickel-bronze, 304 stainless steel, cast iron, tenzalloy, brass, or ABS

thread body: ABS

cleanout plug: slotted polypropylene

COVER LOAD RATING

nickel-bronze: 4,000 lbs. (medium duty)

stainless steel: 4,000 lbs. (medium duty)

cast iron: 5,000 lbs. (heavy duty)

brass: 4,000 lbs. (medium duty)

tenzalloy: 1,250 lbs. (light duty)


ABS: 1,000 lbs. (light duty)

DIMENSIONS

	<i>round pattern</i>	<i>square pattern</i>	<i>cast iron</i>
A: ring/cover diameter			
2" cleanout	4½"	---	---
3" cleanout	5½"	5⅝"	6⅛"
4" cleanout	6½"	6 ¹¹ / ₁₆ "	6 ⁵ / ₈ "
B: height	2 ⁷ / ₈ "	2 ⁷ / ₈ "	3 ³ / ₈ "
C: plug			
2" cleanout	1½" MIP	---	---
3" cleanout	2½" MIP	2½" MIP	2½" MIP
4" cleanout	3½" MIP	3½" MIP	3½" MIP



852-3LNR

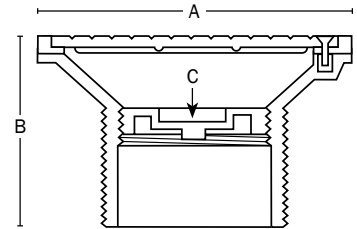

Create Item Number

852- A B C

e.g. 852-4LSQV = 4" MIP thread cleanout with square stainless steel cover and vandal-resistant screws

A CONNECTION SIZE

- 2 2" MIP thread¹
- 3 3" MIP thread
- 4 4" MIP thread

¹ 2" is only available with round nickel-bronze or stainless steel ring and cover.

B RING & COVER

- LNR round nickel-bronze
- LNQ square nickel-bronze
- LSR round stainless steel
- LSQ square stainless steel
- Li round cast iron
- LBR round brass
- LBQ square brass
- LTR round tenzalloy
- LP round ABS²

² ABS thread body provides integral cover ring

C OPTIONS (FACTORY INSTALLED)

- V vandal-resistant cover screws
 - S stamped cover, specify letters³
- ³ NOT available with cast iron ring & cover