

TRENCH DRAIN

» 865 SERIES

FastTrack™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION


Sioux Chief 865 Series FastTrack trench drain shall be used where necessary to convey surface water into drainage system. Trench drain channel shall be sloped (0.75%) or neutral and seamlessly molded from lightweight, durable, chemical-resistant material. Channel shall include construction covers (2), stainless steel grate anchors (6), and integral bottom outlet for optional connection. Channel shall be designed with structure-reinforcing ribs and side anchors (12 per channel) for securing channel to re-bar (1/2" #4). Channels shall connect end-to-end, in proper sequence, with mechanical, tongue-in-groove style joint. Channel shall have a modified bottom radius to improve flow rate and reduce sediment buildup. Designed in accordance with ASME A112.6.3-01

MATERIALS

- Channel:** High-density polyethylene
- Grate Anchors:** Stainless steel
- Construction Cover:** High-density polyethylene
- Screws:** Stainless steel

DIMENSIONS (see table below for specific dimensions)

- A: Length 72"
- B: Overall width 9 3/4"
- C: Channel width 4 1/2"
- D: Cover/grate width 6"
- E: Ribs (on center) 6"
- F: Outlet offset 3"
- G: Connection size 4" No-hub

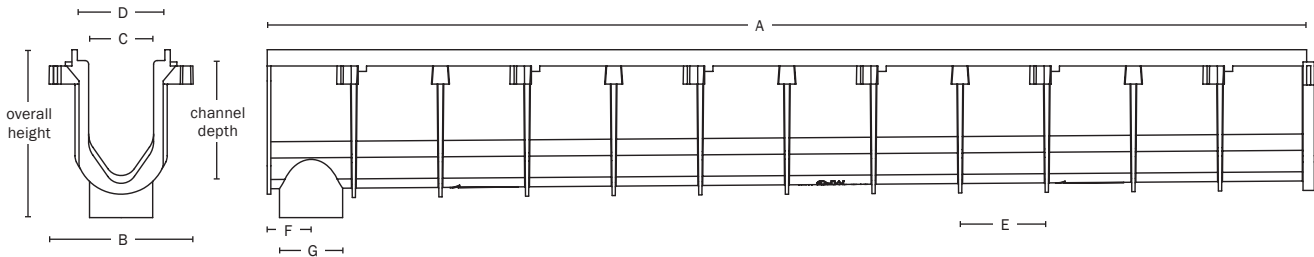

Item Number	Channel Depth		Overall Height ¹	Slope Type	Weight ²	Est. Flow Rate ³	
	Shallow End	Deep End				GPM	CFS
865-S1	3.62"	4.16"	7.21"	Sloped	15.4	91.23	0.20
865-S2	4.16"	4.70"	7.75"	Sloped	16.4	119.13	0.27
865-N3	4.70"	4.70"	7.75"	Neutral	17.6	-	-
865-S3	4.70"	5.24"	8.29"	Sloped	17.4	147.79	0.33
865-S4	5.24"	5.78"	8.83"	Sloped	18.4	176.97	0.39
865-N5	5.78"	5.78"	8.83"	Neutral	19.6	-	-
865-S5	5.78"	6.32"	9.37"	Sloped	19.4	206.55	0.46
865-S6	6.32"	6.86"	9.91"	Sloped	20.4	236.42	0.53
865-N7	6.86"	6.86"	9.91"	Neutral	21.6	-	-
865-S7	6.86"	7.40"	10.45"	Sloped	21.4	266.52	0.59
865-S8	7.40"	7.94"	10.99"	Sloped	21.4	296.81	0.66
865-N9	7.94"	7.94"	10.99"	Neutral	22.6	-	-
865-S9	7.94"	8.48"	11.53"	Sloped	22.4	327.23	0.73

¹ Add 1" to overall height when using iron frame ² Weight includes grate anchors (6) and construction covers (2)
³ Flow rate is estimated for the single channel only (open ends, no grate), and is based on calculation using Manning's equation