

POLYURETHANE MICRO FUEL LINE

/// BLENDED POLYURETHANE

SPECIFICATION

Micro fuel line is manufactured with polyurethane, with no plasticizers that can cause flow contamination or tube hardening. It is extremely flexible and resilient, while also resistant to weathering, tearing, ozone radiation, and surface abrasion. Polyurethane's wide operating temperature range and superior resistance to oil, grease, and fuels make it the right choice for a long lasting fuel line.

ATTRIBUTES

- Extremely flexible and resilient, while also resistant to weathering, tearing, ozone radiation and surface abrasion
- Color: Translucent orange

MATERIALS

Micro fuel line is manufactured with polyurethane, with no plasticizers that can cause flow contamination or tube hardening.

APPLICATIONS

- Fuel line for small motors
- Lawn mowers
- Boat motor
- Snow blowers

RESISTANCE

Oil, grease and fuels.
(See list on website for listing of chemicals)

Operating temperature range: -95°F (-71°C) to 200°F (93°C)

Material: Blended polyurethane

Color: Translucent orange

Hardness: Durometer Shore A 80+/-3

PACKAGING

Reels


*Custom lengths available in large quantity only. Contact your local rep to confirm availability.

PRESSURE RANGE

I.D. INCH	O.D. INCH	WALL INCH	WORKING PRESSURE (PSI @ 70°F)
3/32	3/16	.1875	133
7/64	1/4	.1406	133
1/8	1/4	.125	133

 **WARNING: Not intended for use with potable water.**

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

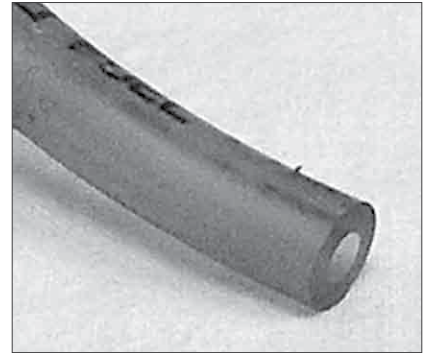

Create Item Number

900-14 A B R C D

e.g. **900-14010R01005:** Micro Fuel Line 7/64" ID X 1/4" OD, Orange, 100ft Reel

ID SIZE <u>A</u>	WALL <u>B</u>	LENGTH <u>C</u>	PACKAGE <u>D</u>
01 = 7/64" or 3/32"	0 = Misc	0010 = 10ft	5 = Reels
02 = 1/8"	3 = .0625"	0100 = 100ft	
	8 = .1875"		



*Not all size, wall thickness and length combinations available. Contact your local rep to confirm availability.