

# The Next Evolution of Line Sets.



# WHAT IS PYTHON?

PYTHON™ IS A PERT-AL-PERT LINE SET AND COMPRESSION FIT-TING SYSTEM DESIGNED FOR BOTH SPLIT SYSTEM AND MINI-SPLIT SYSTEM APPLICATIONS.

# **FEATURES**

FOR HVAC RESIDENTIAL & COMMERCIAL APPLICATIONS

LIGHTWEIGHT

half the weight of copper pipe

ICC-ES PMG-1675 Listed

PRODUCT TESTED AND LISTED TO ASTM F3506-21 standard specification

CHEMICAL, UV & KINK RESISTANT

NO NEED FOR A TORCH ON SITE

# **SPECS**

MAXIMUM DESIGN PRESSURE 700psi MAXIMUM DESIGN TEMPERATURE 180°F ID & FLOW RATES same as copper pipe APPROVED REFRIGERANTS R410a, R32, R454b AVAILABLE PIPE SIZES 1/4", 3/8", 1/2", 5/8" PIPE MARKED EVERY FOOT

## INSULATION

COMPLETELY RECYCLABLE

NON-POROUS, FIBER-FREE closed-cell insulation resists mold growth

MANUFACTURED WITHOUT CFCs, HCFCs, HFCs, PBDEs, and formaldehyde

YEAR-ROUND PIPE PROTECTION from freezing and condensation

TEAR RESISTANT

### **TECHNICAL REQUIREMENTS**

STANDARD COVERS

UV requirements, sustained & burst pressure testing, refrigerant exposure testing, pull testing, vibration testing, fatigue testing

FITTING SECTION OF THE STANDARD COVERS

Burst pressure testing, sustained pressure testing, thermocycle testing

PIPE SHALL BE CUT WITH A TUBING CUTTER

PIPE SHALL BE REAMED AND CHAMFERED

with a Python chamfering tool


PIPE FITTINGS SHALL BE INSTALLED with a torque wrench to the specified torque

# LINE SETS & ACCESSORIES

Sizes shown are in stock. Custom lengths available for order.

PART NO.	DESCRIPTION	PKG QTY	UPC
INSULATED I	LINE SETS		
5030	1/4"NPS x 1/2"IN x 50' Line Set	50 ft/Coil	840889050303
5130	3/8"NPS x 1/2"IN x 50' Line Set	50 ft/Coil	840889051300
5230	1/2"NPS x 1/2"IN x 50' Line Set	50 ft/Coil	840889052307
5330	5/8"NPS x 1/2"IN x 50' Line Set	50 ft/Coil	840889053304
5050	1/4"NPS x 1/2"IN x 300' Line Set	300 ft/Coil	840889050501
5150	3/8"NPS x 1/2"IN x 300' Line Set	300 ft/Coil	840889051508
5250	1/2"NPS x 1/2"IN x 300' Line Set	300 ft/Coil	840889052505
5350	5/8"NPS x 1/2"IN x 300' Line Set	300 ft/Coil	840889053502
NON-INSULA	ATED LINE SETS		
5020	1/4"NPS x 50' Line Set	50 ft/Coil	840889050204
5120	3/8"NPS x 50' Line Set	50 ft/Coil	840889051201
5220	1/2"NPS x 50' Line Set	50 ft/Coil	840889052208
5320	5/8"NPS x 50' Line Set	50 ft/Coil	840889053205
5040	1/4"NPS x 300' Line Set	300 ft/Coil	840889050402
5140	3/8"NPS x 300' Line Set	300 ft/Coil	840889051409
5240	1/2"NPS x 300' Line Set	300 ft/Coil	840889052406
5340	5/8"NPS x 300' Line Set	300 ft/Coil	840889053403
PYTHON CHA	AMFERING TOOLS		
7000	Python Chamfering Tool 1/4" x 3/8" x 1/2"	25/Box	840889070004
7001	Python Chamfering Tool 5/8" x 3/4" x 7/8"	25/Box	840889070011



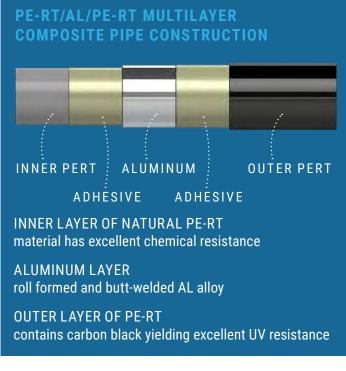

# FITTINGS

PART NO.	DESCRIPTION	QTY	UPC		
MALE COMP	PRESSION FITTINGS				
6000	1/4" Male Compression Fitting Assembly	36/Box	840889060005		
6005	3/8" Male Compression Fitting Assembly	36/Box	840889060050	The state of the s	
6010	1/2" Male Compression Fitting Assembly	36/Box	840889060104		
6015	5/8" Male Compression Fitting Assembly	24/Box	840889060159		
FEMALE CON	MPRESSION FITTINGS				
6100	1/4" Female Compression Fitting Assembly	36/Box	840889061002		
6105	3/8" Female Compression Fitting Assembly	36/Box	840889061057		
6110	1/2" Female Compression Fitting Assembly	36/Box	840889061101		
6115	5/8" Female Compression Fitting Assembly	24/Box	840889061156		
COUPLER CO	DMPRESSION FITTINGS				
6200	1/4" Coupler Compression Fitting Assembly	36/Box	840889062009		
6205	3/8" Coupler Compression Fitting Assembly	36/Box	840889062054		
6210	1/2" Coupler Compression Fitting Assembly	36/Box	840889062108		
6215	5/8" Coupler Compression Fitting Assembly	24/Box	840889062153		
COPPER STU	JBS				
6300	1/4" Copper Stub	50/Box	840889063006		
6305	3/8" Copper Stub	50/Box	840889063051		
6310	1/2" Copper Stub	50/Box	840889063105		
6315	5/8" Copper Stub	50/Box	840889063150		
FLARE NUTS	8				
6400	1/4" Flare Nut	50/Box	840889064003		
6405	3/8" Flare Nut	50/Box	840889064058		
6410	1/2" Flare Nut	50/Box	840889064102		
6415	5/8" Flare Nut	50/Box	840889064157		
MALE FLARE	ELBOWS				
6500	1/4" Male Flare Elbow	50/Box	840889065000		
6505	3/8" Male Flare Elbow	50/Box	840889065055		
6510	1/2" Male Flare Elbow	50/Box	840889065109		
6515	5/8" Male Flare Elbow	50/Box	840889065154		

### COMPRESSION FITTING ASSEMBLY

SOLID BRASS CONSTRUCTION can be applied in the field without the use of special tool

SPLIT SYSTEM CONNECTIONS flared threaded male connection to flare nut on brazed copper

MINI SPLIT CONNECTION flared female threaded connection to king valve



# Trust in Python.

# WARRANTY I PYTHON LINE SETS

Titeflex warrants its products to be free from any defect of workmanship and material. Should any such defects be discovered, the questionable product must be returned to Titeflex. If, upon inspection, the part proves to be defective, Titeflex will furnish a replacement, or, at its option, repair the part.

This warranty shall not apply to any part or parts of the Python Product System if it has been installed, altered, repaired or misused, through negligence or otherwise, in a way that in the option of Titeflex affects the reliability of, or detracts from, the performance of the product. Nor does this warranty cover replacements or repairs necessitated by loss or damage resulting from any cause beyond the control of Titeflex, including but not limited to, acts of God, acts of government, floods and fires.

The obligation of Titeflex under this warranty is limited, at Titeflex's discretion, to 1) making a replacement part available, 2) the repair of the defective part, or 3) refund of purchase price. This does not include the furnishing of any labor involved or connected therewith, such as that required to diagnose trouble or to remove or install any such product, nor does it include responsibility for any transportation expenses or any damages or losses incurred in transportation in connection therewith.

THE FOREGOING IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESSED, IMPLIED OR STATUTORY, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTY OF MERCHANTABILITY, AND TITE-FLEX NEITHER ASSUMES NOR AUTHORIZES ANY PERSON TO ASSUME FOR TITEFLEX ANY OTHER OBLIGATION OR LIABILITY IN CONNECTION WITH THE SALE OF ITS PRODUCTS.

# INSTALLATION REQUIREMENTS

- Installation must be performed strictly in accordance with local HVAC and/or building codes, and in accordance with Python installation instructions.
- 2. Installation must be performed by a licensed HVAC installer.
- 3. Pressure testing must be performed during rough construction with piping system exposed.
- 4. Titeflex assumes no responsibility for product or labor for any system, which has been improperly installed.











The Next Evolution of Line Sets.



